


# COMMERCIAL PRESSURE REDUCING VALVE

The Reliance Commercial PRV is a high flow pressure regulating valve for Commercial and Industrial Installations.

Model	Catalogue Number
50mm Flange	PRV50
65mm Flange	PRV65
80mm Flange	PRV80
100mm Flange	PRV100

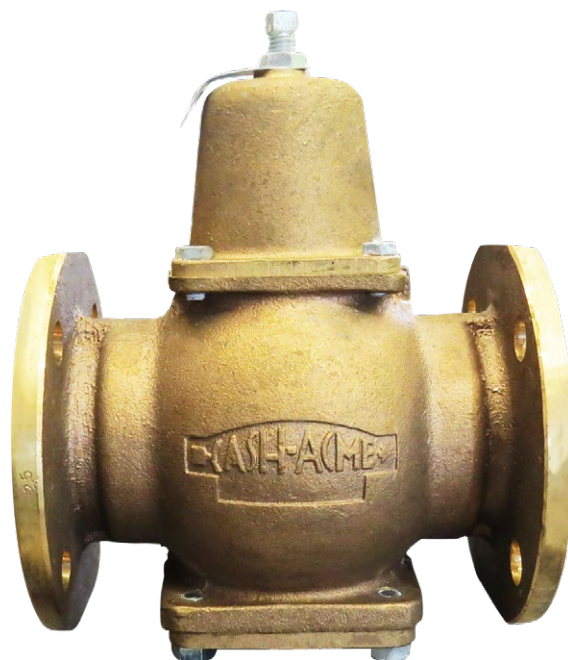

## Description

The Reliance Commercial PRV is supplied standard with flanged connections from 50mm to 100mm diameter. Reliance Commercial PRVs are adjustable from 350 - 750kPa, and are factory set at 500kPa.

## Application

The high capacity Reliance Commercial PRV is ideal for supply to large usage facilities such as factories and industrial establishments. The Reliance Commercial PRV must be installed in the horizontal position, with the spring chamber upright. For ease of operation and maintenance it is suggested that manual isolation valves be installed upstream and downstream of the valve.

## Materials

Body	Cast Gunmetal
Spring	Spring Steel
Piston	Lead Free Bronze
Body Seat	Lead Free Bronze
Screw/Nut	316 Stainless Steel
Piston	DZR Brass
O-Ring	BUNA-N
Seat Ring	304 Stainless Steel

## Features and Benefits


- Watermark approved product
- Balanced piston design
- Provides closer regulation and quiet performance
- Every valve is fully factory tested
- Specify and install with confidence
- Simple dependable construction
- Fewer parts for greater reliability
- Flanged connections
- Suitable for all standard installations

# COMMERCIAL PRESSURE REDUCING VALVE

## Technical Specifications

Outlet Pressure Range	350 to 750 kPa
Factory Set Pressure	500 kPa
Maximum Temperature	60°C
Maximum Inlet Pressure	1600 kPa

## Flow Characteristics

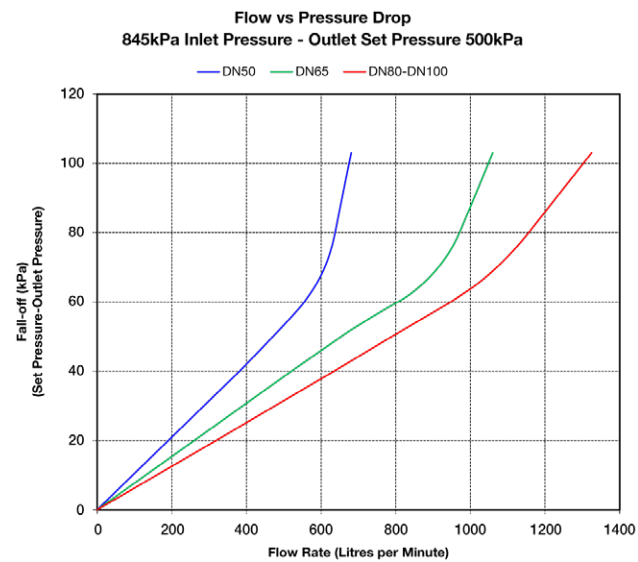

## Dimensions

Model	DN	A	B	C
PRV50	50mm Table D	198	190	90
PRV65	65mm Table D	201	190	90
PRV80	80mm Table D	210	190	90
PRV100	100mm Table D	222	190	102

Note: All dimensions in millimetres unless otherwise specified.

