


LOW PRESSURE PRV - NON-ADJUSTABLE

RMC water valves

RMC's Low Pressure PRV is specifically designed for set pressures between 30-100kPa.

| Model | Catalogue Number |
|-------------------------|------------------|
| 15mm x 15mm (50-100kPa) | D501 |
| 15mm x 15mm (30kPa) | D504 |
| 15mm x 15mm (35kPa) | D505 |
| 15mm x 15mm (50kPa) | D508 |
| 15mm x 20mm (30kPa) | D520 |
| 15mm x 20mm (50kPa) | D521 |

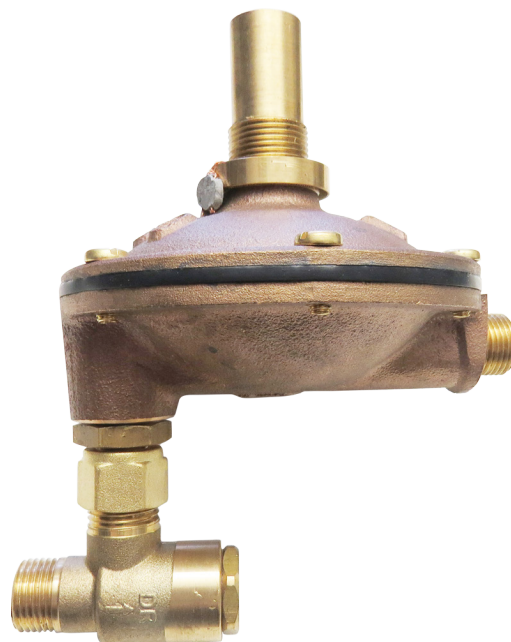

Description

The RMC Low Pressure PRV can reduce the system pressure down between 30-100kPa depending on the requirement of the system. These valves provide a solution for a range of pressures which standard PRVs cannot achieve.

The RMC Low Pressure PRV is preset to certain pressures. Please refer to the catalogue numbers above for details.

Features and Benefits

- Chloramine resistance EPDM Diaphragm
- Low set pressure range
- Diaphragm actuated seat mechanism
- Inline strainer

Application

Systems where pressures lower than 100kPa are required.

Materials

| | |
|----------------------|---------------------|
| Body | Leaded Gun Metal |
| Spring | 304 Stainless Steel |
| Diaphragm | EPDM |
| Backing Plate | Stainless Steel |
| Strainer | Stainless Steel |
| Seat | Stainless Steel |



Uniquely Australian

LOW PRESSURE PRV - NON-ADJUSTABLE



Performance Specifications

| | |
|------------------------|---------------|
| Maximum Inlet Pressure | 1200kPa |
| Maximum Temperature | 40°C |
| Pressure Set | 30, 35, 50kPa |

Dimensions All dimensions in millimetres unless otherwise stated

| | | | |
|---|-----|---|-----|
| H | 200 | W | 170 |
|---|-----|---|-----|

