

ISOLATING NON-RETURN UNDERSINK VALVE



The RMC Undersink Valve with its isolation and non-return functionality is the ideal solution to manage multiple connections.

Catalogue Numbers

Size Catalogue Number
15mm Inlet NRU501

*See connection diagram below.



Description

The RMC Undersink Valve has a single inlet, with multiple outlets to suit various applications. With an internal non-return valve, the two outlets can be connected to the same valve without the risk of a cross connection.

The valve is suited for both hot and cold water applications and can be easily identified by using the correct coloured marker on the handle.

Technical Specifications

Maximum Allowable Opening Pressure:	1920 kPa
Maximum Operating Temperature:	80° C
Fluid Media:	Water


Features and Benefits

- Approved to AS5830.1
- Integrated non-return valve
- Different markers for hot and cold water applications


Application

The valve is intended for installations under a sink to allow for connections to multiple appliances.

Dimensions

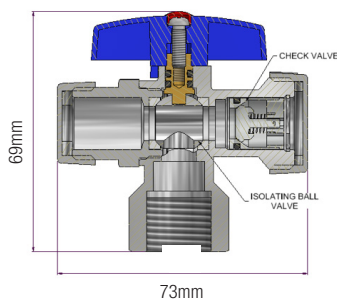

Connections

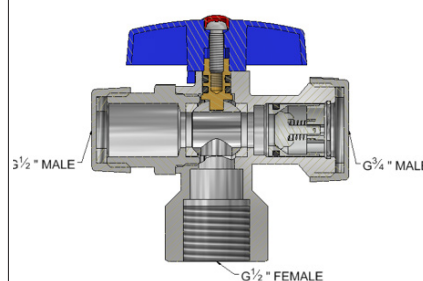

Installation

