


# Mini Dual Check Valve

## Scope of Use/Specification Sheet

The Mini Dual Check Valve is designed to prevent cross connections of non potable water into safe drinking water systems. The device is compact, economical, and easy to install both horizontally and vertically. It comprises of two independently acting, internally loaded check valves in series.

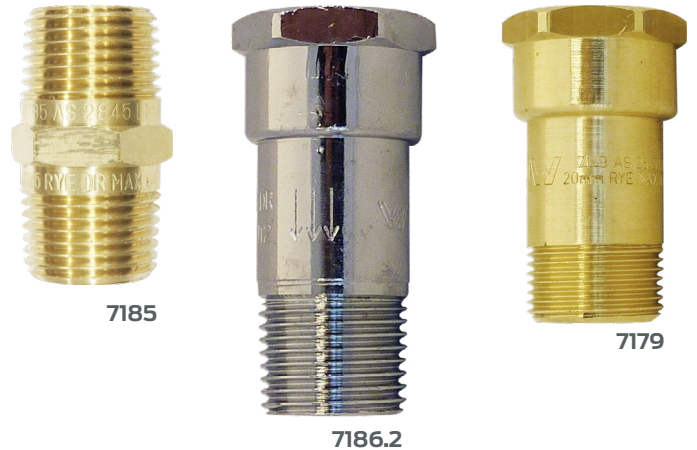

| Product Code |                        |              |
|--------------|------------------------|--------------|
| Size         |                        | Product Code |
| 15mm         | Male x Male            | 7185         |
|              | Male x Male – Chrome   | 7185.2       |
|              | Male x Female          | 7186         |
|              | Male x Female – Chrome | 7186.2       |
| 20mm         | Male x Female          | 7179         |
|              | Male x Female – Chrome | 7179.2       |

| Materials       |                                 |
|-----------------|---------------------------------|
| Body and covers | DR brass or chrome plate finish |
| Springs         | Stainless steel                 |

### Features and Benefits


- Protects against back pressure and back siphonage
- Suitable for low hazard applications
- Compact and lightweight
- Corrosion resistant
- Independently operating check valves
- Maximum working pressure of 1200kPa
- Operating temperature range of 1°C to 60°C (7185, 7185.2, 7186 and 7186.2)
- Operating temperature range of 1°C to 80°C (7179 and 7179.2)
- Suitable for vertical and horizontal installations
- Choice of brass or chrome plated finish
- Approved to AS 2845.1

# Mini Dual Check Valve

## Dimensions

| Model | Length (A) | Height (B) |
|-------|------------|------------|
| 7185  | 41         | 22         |
| 7186  | 56         | 25         |
| 7179  | 59         | 32         |

Note: All measurements in mm unless otherwise stated.

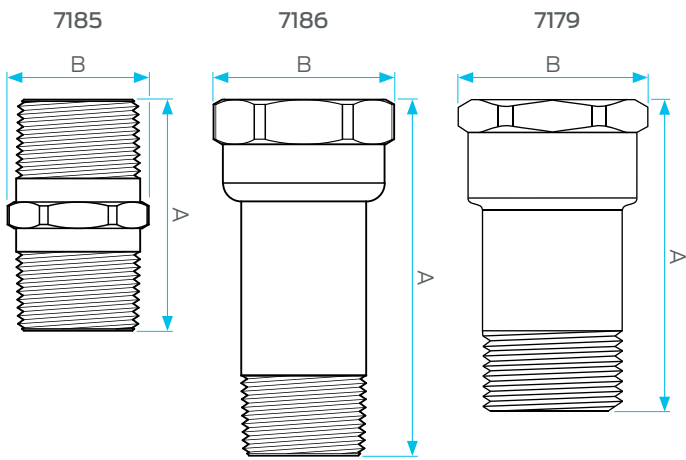

## Standards and Approvals



AS 2845.1  
WMKA1325

## Performance Specifications

| Size                     | 7185     | 7186       | 7179       |
|--------------------------|----------|------------|------------|
| Inlet                    | Male BSP | Female BSP | Female BSP |
| Outlet                   | Male BSP | Male BSP   | Male BSP   |
| Rated flow               | 0.15L/s  | 0.15L/s    | 0.32L/s    |
| Maximum working pressure | 1200kPa  | 1200kPa    | 1200kPa    |
| Maximum temperature      | 60°C     | 60°C       | 80°C       |
| Maximum pressure loss    | 50kPa    | 50kPa      | 50kPa      |

## Application

The Mini Dual Check Valve provides protection to the potable water supply from contamination in low hazard applications such as water filters and laboratory sinks.

## Installation

Installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three – Plumbing Code of Australia, associated reference standards as applicable at the time and AS/NZS 3500.1.

## Warranty

Reliance Worldwide Corporation (Aust.) Pty. Ltd. (RWC) will either replace or repair any defective goods where the defect arose as a result of manufacture within the warranty period. You may contact RWC at the phone number, address or e-mail shown below for further information or to make a claim.

Visit [www.rmc.com.au/warranty](http://www.rmc.com.au/warranty) to view the warranty statement in full and for further important information.