


Y-Strainers

15mm - 50mm

Scope of Use / Specification Sheet

RMC's Y-Strainers provide downstream protection from dirt and debris. Available in Lead-free Bronze with female threaded connections.

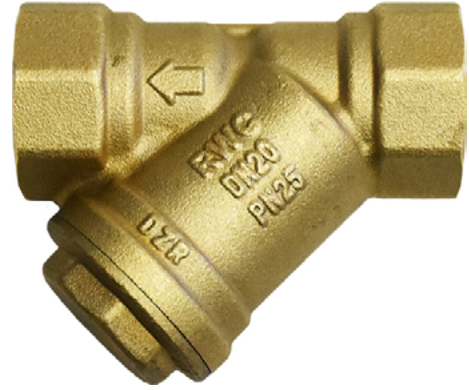

20Y

Product List

Order Code	Description
15Y	15mm (1/2") Y Strainer
20Y	20mm (3/4") Y Strainer
25Y	25mm (1") Y Strainer
32Y	32mm (1 1/4") Y Strainer
40Y	40mm (1 1/2") Y Strainer
50Y	50mm (2") Y Strainer

Features and Benefits

- Robust DZR Lead-Free Bronze Body
- Easily removable cap for strainer access and cleaning
- 316 Stainless Steel mesh strainer
- 600 micron mesh to catch debris and impurities in the water
- Meets Australian Standard for potable water supply

Application

The RMC Y-Strainers can be installed upstream of any valve that requires protection from dirt and debris. The Y-Strainer should be installed with the arrow marking on the body in line with the system's flow direction. Easy access to the strainer cap is required for removal and cleaning.

Installation

Installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three – Plumbing Code of Australia, associated reference standards as applicable at the time and AS/NZS 3500.1.

Standards and Approvals




AS 3688
WMKA000979

Dimensions

Order Code	A	B	C
15Y	Rp 1/2" Female	41	62
20Y	Rp 3/4" Female	49	73
25Y	Rp 1" Female	59	89
32Y	Rp 1 1/4" Female	69	103
40Y	Rp 1 1/2" Female	75	114
50Y	Rp 2" Female	90	136

Note: All measurements in mm unless otherwise stated.

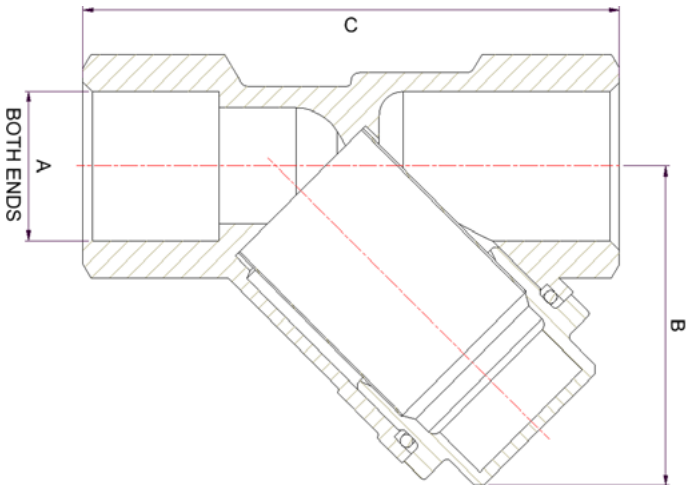

Materials

Body	Lead-Free Bronze
Cap	Lead-Free Bronze
Strainer	Stainless Steel
Seals	PTFE