

Auto Air Vent

Scope of Use / Specification Sheet

The Auto Air Vent is an air and vacuum relief valve for use on closed-circuit solar hot water systems and recirculated hot water systems.



AEX1501

Product List

Order Code	Description
AEX1501	Auto Air Vent 15mm Lead Free

Description

The Auto Air Vent has been designed using high temperature Viton® O-Rings seal in order to withstand high stagnation temperatures encountered in solar hot water systems.

The Auto Air Vent will also act as a vacuum breaker in situations where the closed circuit is isolated and drained.

During normal operation, accumulated air in the system is relieved through the valve by means of a float mechanism. Gathered air bubbles cause the float to drop, opening the valve and forcing the air out under water pressure until the float rises and once again seals the valve.

Application

The Auto Air Vent is an air and vacuum relief valve designed for use with solar and recirculated hot water systems.

Features and Benefits

- Convenient connection size which removes the need for adaptors and additional joins in pipe work
- Stainless steel float
- Capable of withstanding high pressures when commissioning solar hot water systems
- 'Always open' vent cap
- Valve will still vent air with the cap fully screwed down which avoids potential installation issues
- Vent cap designed to minimise the risk of blockage due to foreign matter
- Dezincification resistant
- Chrome plated brass body meets Australian Standard for potable water supply
- High temperature Viton® O-Rings
- Individually tested

Materials

Body/cover	Chrome plated DR lead free brass
Float/stem/locating screw	Stainless steel
Internal components	Stainless steel
Seals	Viton® high temperature
Cap	Chrome plated DR brass
External retaining ring/locknut	Chrome plated brass (non-wetted parts)

Auto Air Vent


Installation

Installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three – Plumbing Code of Australia, associated reference standards as applicable at the time and AS/NZS 3500.1.

Refer to solar hot water system manufacturers' installation requirements for the correct positioning of the valve in the system. Typically, the valve is installed at the highest point of the solar hot water system, or at a location where air bubbles are likely to accumulate.

If installed in a recirculated hot water system, the valve should be positioned over a tundish.

The Auto Air Vent valve must be installed in its vertical orientation. Failure to do so may result in the valve failing to perform as intended.

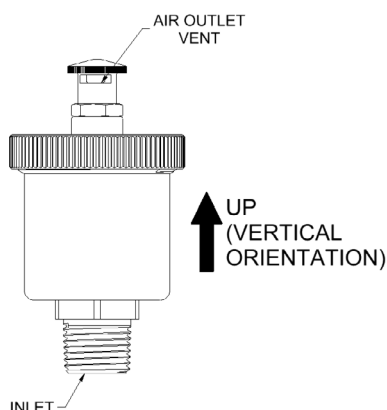

Working Pressures and Temperatures

Maximum temperature	230°C
Maximum working pressure	1400kPa
Connection	R $\frac{1}{2}$ BSPT

Standards and Approvals



Warranty

Reliance Worldwide Corporation (Aust.) Pty. Ltd. (RWC) will either replace or repair any defective goods where the defect arose as a result of manufacture within the warranty period. You may contact RWC at the phone number or e-mail shown below for further information or to make a claim.

Visit www.rmc.com.au/warranty to view the warranty statement in full and for further important information.

Dimensions

Model	Inlet	A	B	C	D	E*	F	G
Auto Air Vent 15mm	R $\frac{1}{2}$	98	75	23	17	26	46	65

Note: All measurements in mm unless otherwise stated.
*across flats

