

RMC Leak Protection Valve

Scope of Use / Specification Sheet

The RMC Leak Protection Valve is an electronic automated shut off valve for use with a mains water supplied water heater installed with a safe tray that is not plumbed to waste.



LPV15X

Product List

Order Code	Description
LPV15X	DN15 Leak Protection Valve

Description

The RMC Leak Protection Valve is an electronic automated shut off valve for use with a mains water supplied water heater installed with a safe tray that is not plumbed to waste.

In the event of a leak, accumulated water in the safe tray is detected by the valve sensor and the water supply is isolated.

The valve is designed to be installed in the water supply pipework, adjacent to the cold water inlet of the water heater and upstream of any expansion control valve (if fitted).

Operating Specifications

Fluid Media:	Water
Maximum Water Supply Pressure:	1000kPa or 1MPa
Maximum Operating Temperature:	90°C
IP Rating:	IP67
Inlet/Outlet connection:	15Cn (1/2" Comp)
Battery Type:	2 × AA batteries

Standards and Approvals

**Lead Free**WMTS-476
WMK26899

Features and Benefits

- Shut off LED indicator
- Audible alarm trigger warning
- Isolating valve suitable for horizontal and vertical installation
- Meets AS/NZS 3500.4 for protections against damage from leaking water
- Meets AS/NZS 4020 for potable water supply
- Flexible installation - 1200mm cable length between isolating valve and sensor
- Optional backup 5V power supply adaptor for constant 240V power
- Designed to work on any safe tray
- Sensor contact can be mounted in multiple orientations

Warranty

Reliance Worldwide Corporation (Aust.) Pty. Ltd. (RWC) will either replace or repair any defective goods where the defect arose as a result of manufacture within the warranty period. You may contact RWC at the phone number, address or e-mail shown below for further information or to make a claim.

Visit www.rmc.com.au/warranty to view the warranty statement in full and for further important information.

RMC Leak Protection Valve




Dimensions

Product	A	B	C	D	E	F
LPV15X	82	83	15Cn	67	87	71

Note: All measurements in mm unless otherwise stated.

Materials

Body	Lead free DZR Brass
Locking Cap	Lead free DZR Brass
Ball	SS304
O-Ring	FKM
Sealing	PTFE
Actuator	PPO
Olive	Copper
Nut	Lead free DZR Brass

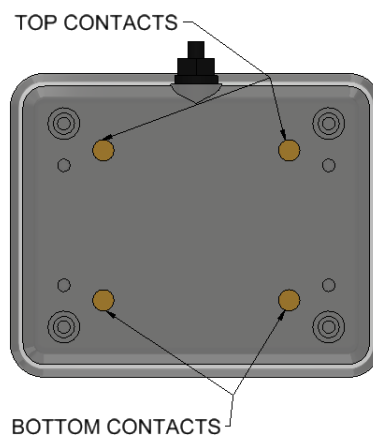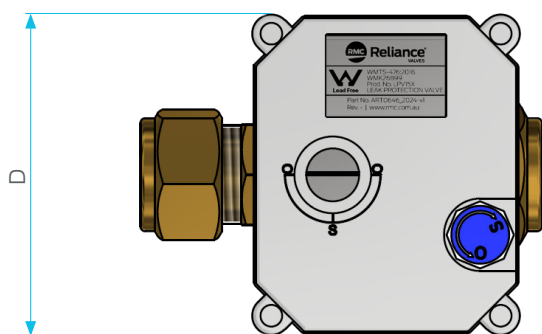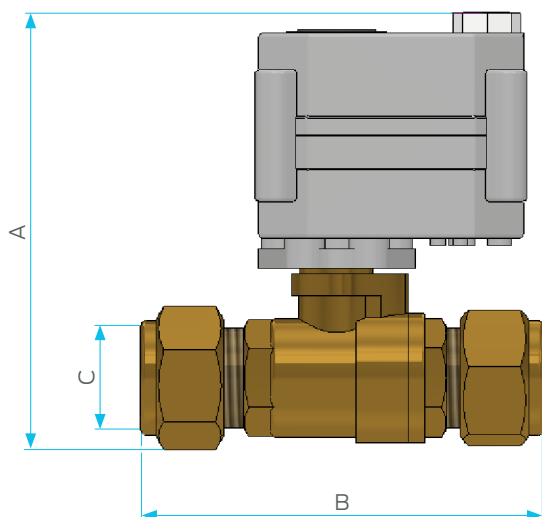

RMC Leak Protection Valve

Suggested install position (square based 450mm tray)



Suggested install position for curved corner trays

