

Electronic Water Control Systems – Flushtronic

Scope of Use / Specification Sheet

This product has been discontinued. Spares remain available.

The Flushtronic detects the presence of users and automatically controls flushing of single or wide trough urinals for maintenance of hygiene.



Flushtronic Kit

Product Code

Model	Catalogue Number
Surface Mount Wide Stall	7685
Surface Mount Single Stall	7675
Inset Mount Wide Stall	7690
Inset Mount Single Stall	7680

Application

The Flushtronic is ideal for use in schools, universities, airports, night clubs, railway stations, factories, theatres, hospitals, sporting clubs, hotels, and restaurants.

As a user approaches, the infra-red passive sensor triggers a solenoid valve for a half flush to wet the urinal, preventing splash back. Depending on whether other users arrive within a short period of time, the controller activates the appropriate flushing operation in line with optimum use of water, maintenance of hygiene, and suppression of unpleasant odours.

Features and Benefits

- Maintains hygienic conditions
- Saves water by controlling the time, frequency and volume of water used in flushing
- Flushing duration and other parameters are easily set
- Automatically flushes six hours after non-use to ensure compliance with regulations
- Simple plug-in connectors allow easy installation
- Spare parts readily available
- Replaces urinal cistern
- Overhead passive infra-red sensor
- Low power consumption

Description

The single stall Flushtronic may be used with stalls up to 600mm wide. The wide trough Flushtronic may be used with troughs up to 2400mm wide. For wider troughs, two or more systems can be installed.


Flushtronic systems include a Y-strainer which must be installed upstream of the solenoid valve. A flush pipe air gap fitting and integrated programmed controller are also included.

Electronic Water Control Systems – Flushtronic

Materials		
Item	Dimensions HxWxD (mm)	Comments
Solenoid Valve	80 x 50 x 30 Lead – 500	Soft Closing
AC/DC Adaptor	75 x 65 x 65 Lead – 3000	240V AC/12V DC 1AMP
Sensor - surface	100 diam. x 30 Lead - 2500	
Sensor - inset	90 diam. ext. / 70 diam. int. x 50 Lead - 2500	
Combination Valve	60 x 50 x 30	DR Brass

Flushtronic Connection Guide

- A** Power adaptor
- B** Infrared Sensor
- C** Solenoid Valve G¹/₂ x G¹/₂
- D** Flushtronic Solenoid Adaptor G¹/₂ x DN20 CN
- E** 300mm Flexible Hose G¹/₂ x G¹/₂
- F** Union Hexagon Nipple R¹/₂ X R¹/₂
- G** Combination Isolating, strainer and non-return valve Rp¹/₂ x Rp¹/₂

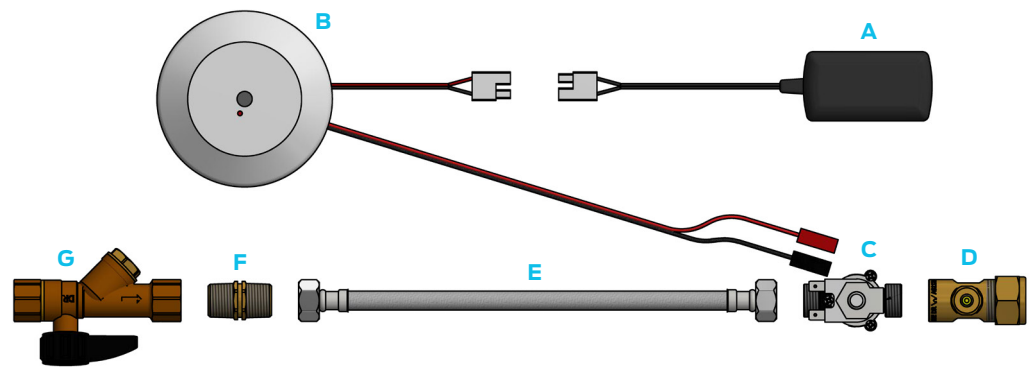

Product Specifications

Water pressure range	50 to 800kPa
Recommended operating pressure	150 to 500kPa
Water control	15mm solenoid valve, normally closed
Sensing	Infra-red sensor, passive

Installation

Installation is subject to the requirements of the applicable regulatory authority, the National Construction Code Volume Three – Plumbing Code of Australia, associated reference standards as applicable at the time and AS/NZS 3500.1.

Inspect for leaks after installing and before concealing.

Standards and Approvals



Warranty

Reliance Worldwide Corporation (Aust.) Pty. Ltd. (RWC) will either replace or repair any defective goods where the defect arose as a result of manufacture within the warranty period. You may contact RWC at the phone number, address or e-mail shown below for further information or to make a claim.

Visit www.rmc.com.au/warranty to view the warranty statement in full and for further important information.



rmc.com.au | 1800 810 803 | sales@rmc.com.au

Reliance Worldwide Corporation (Aust.) Pty. Ltd. reserves the right to change any product specification or information contained in this publication at any time and without notice. All diagrams are illustrative only. Please consult OEM instructions and AS/NZS 3500 for all installations. ABN 71 004 784 301 | © September 2021